

# Decorator Touch Dimmers

600W Single Pole  
1000W Single Pole



RESIDENTIAL  
COMMERCIAL

**C-2**  
LIGHTING AND  
FAN SPEED  
CONTROLS


## Touch Dimmers

### FEATURES


- Ground terminals provided (meets 1999 NEC® requirement to ground dimmers).
- Back wire feature for easy installation.
- Wraparound strap eliminates need for de-rating.
- Air gap on/off switch for servicing fixture (UL required).
- Simple touch control of switching and dimming functions – provides ergonomically simple control that requires no manual dexterity.
- Touch dimmer remembers previous light setting during off period – allows user to return to previous light setting when turning lights on without readjustment.
- True multi-location dimming – allows complete control of lamps from several locations using standard 3-way wiring. Completely retrofittable.
- Radio Frequency Interference (RFI) filtering is standard on all models.

### Decorator Touch Dimmers

Rating	Description	Color	Catalog No.
600W	Gold touch plate Master	Ivory (Bezel) White (Bezel)	6460V 6460W
	Gold touch plate Remote	Ivory (Bezel) White (Bezel)	6461V 6461W
600W	Monochrome Master	Almond	6470A
		Black	6470BK
		Ivory	6470V
		Light Almond	6470LA
		White	6470W
1000W	Monochrome Master	Almond	6471A
		Black	6471BK
		Ivory	6471V
		Light Almond	6471LA
		White	6471W
	Monochrome Remote	Almond	6472A
		Black	6472BK
		Ivory	6472V
		Light Almond	6472LA
		White	6472W

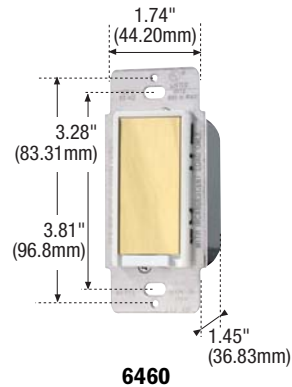


6460

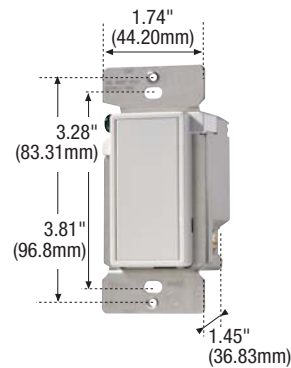


6470

### For Single Dimmer Locations



### For Multiple Dimmer Locations

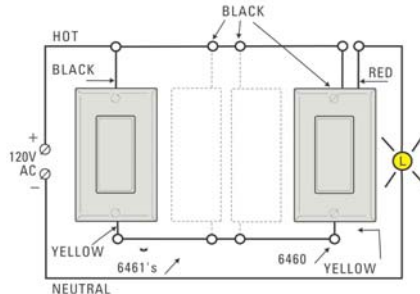

### De-rating

# of Gangs	600W Models	1000W Models
1	No De-rating	No De-rating
2	No De-rating	800W
3 or more	500W	650W

### TESTING & CODE COMPLIANCE

- Meets all UL 1472 requirements.
- Meets all CSA requirements.
- UL and cUL approval (file no. E47967)

### MATERIAL CHARACTERISTICS

Meets flammability requirements per UL94, V2 rated.  
Temperature Rating: 0°C to 35°C.